

EQUIPMENT DATA

A. ENGINE General Motors Model 4045C

HORSE POWER 111 at 1,500 RPM

BORE 4-1/4"

STROKE 5"

FIRING ORDER 1, 3, 4, 2

VALVE SETTING .009 HOT

INJECTOR TIMING 1.460"

LUBE OIL CAPACITY 17 Quarts

LUBE OIL VISCOSITY 0° to 30° SAE 20/above 30° SAE 30

LUBE OIL PRESSURE SHUT-OFF 20 LBS.

RADIATOR CAPACITY

ANTI-FREEZE 50% ELHYL GLYCOL

GENERATOR Delco Products, Model E5221-M3, 62.5 KVA, 88 PF

VOLTAGE 380/220, Phase 3, Cycles 50


B. ALTERNATOR Delco Products, Model E5221M3

C. CONTROL CABINET CAPCO Model

ATTACHMENT "A"



Approved For Release 2001/03/30 : CIA-RDP78-05601A000100250007-6

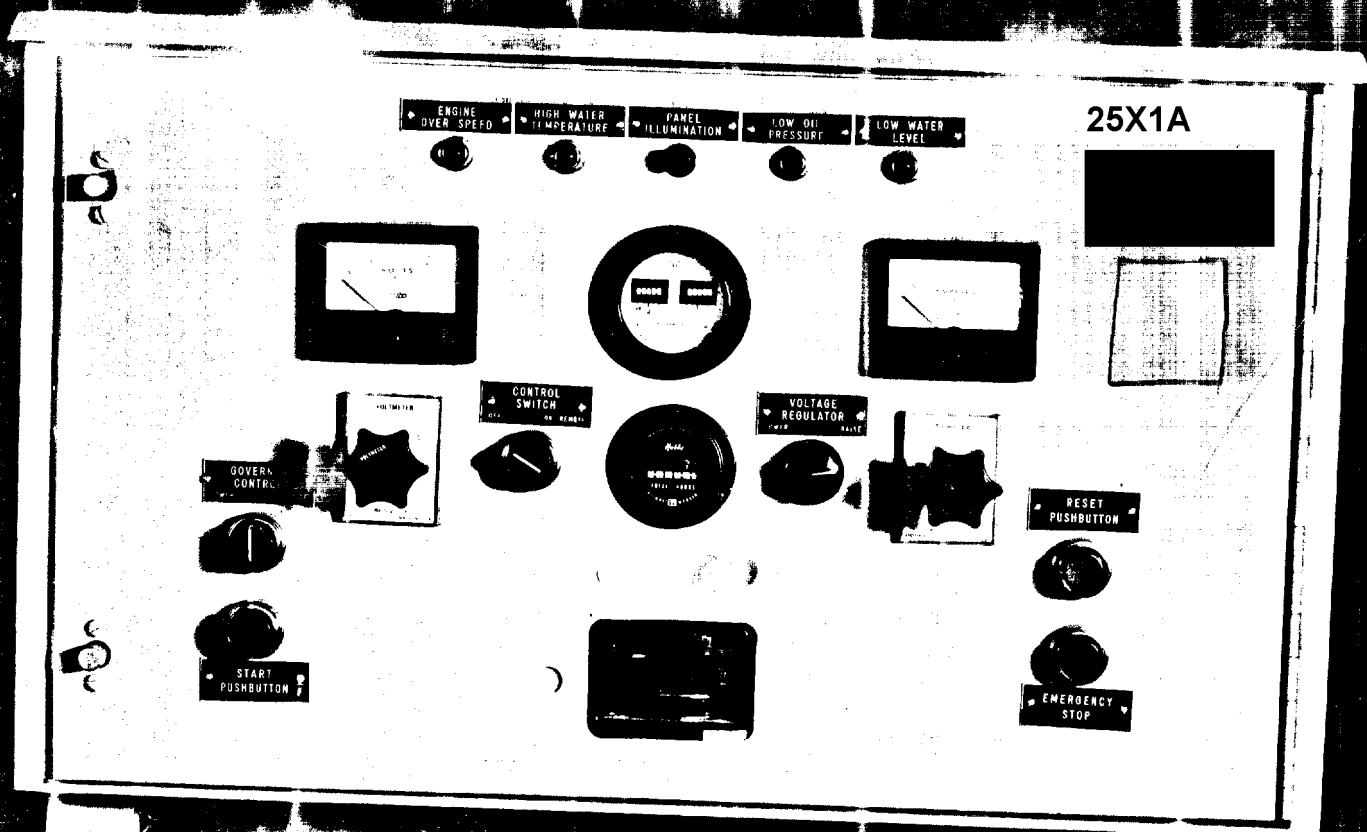

ATTACHMENT "C"




Approved For Release 2001/03/30 : CIA-RDP78-05601A000100250007-6

100000
KILOVOLTS
METER
COMPARISON
(Not shown)

2200P
RHEOSTAT
LOCK DOWN
(Not shown)

KILOVOLTS METER
LOCK DOWN
(Not shown)

ATTACHMENT "up"

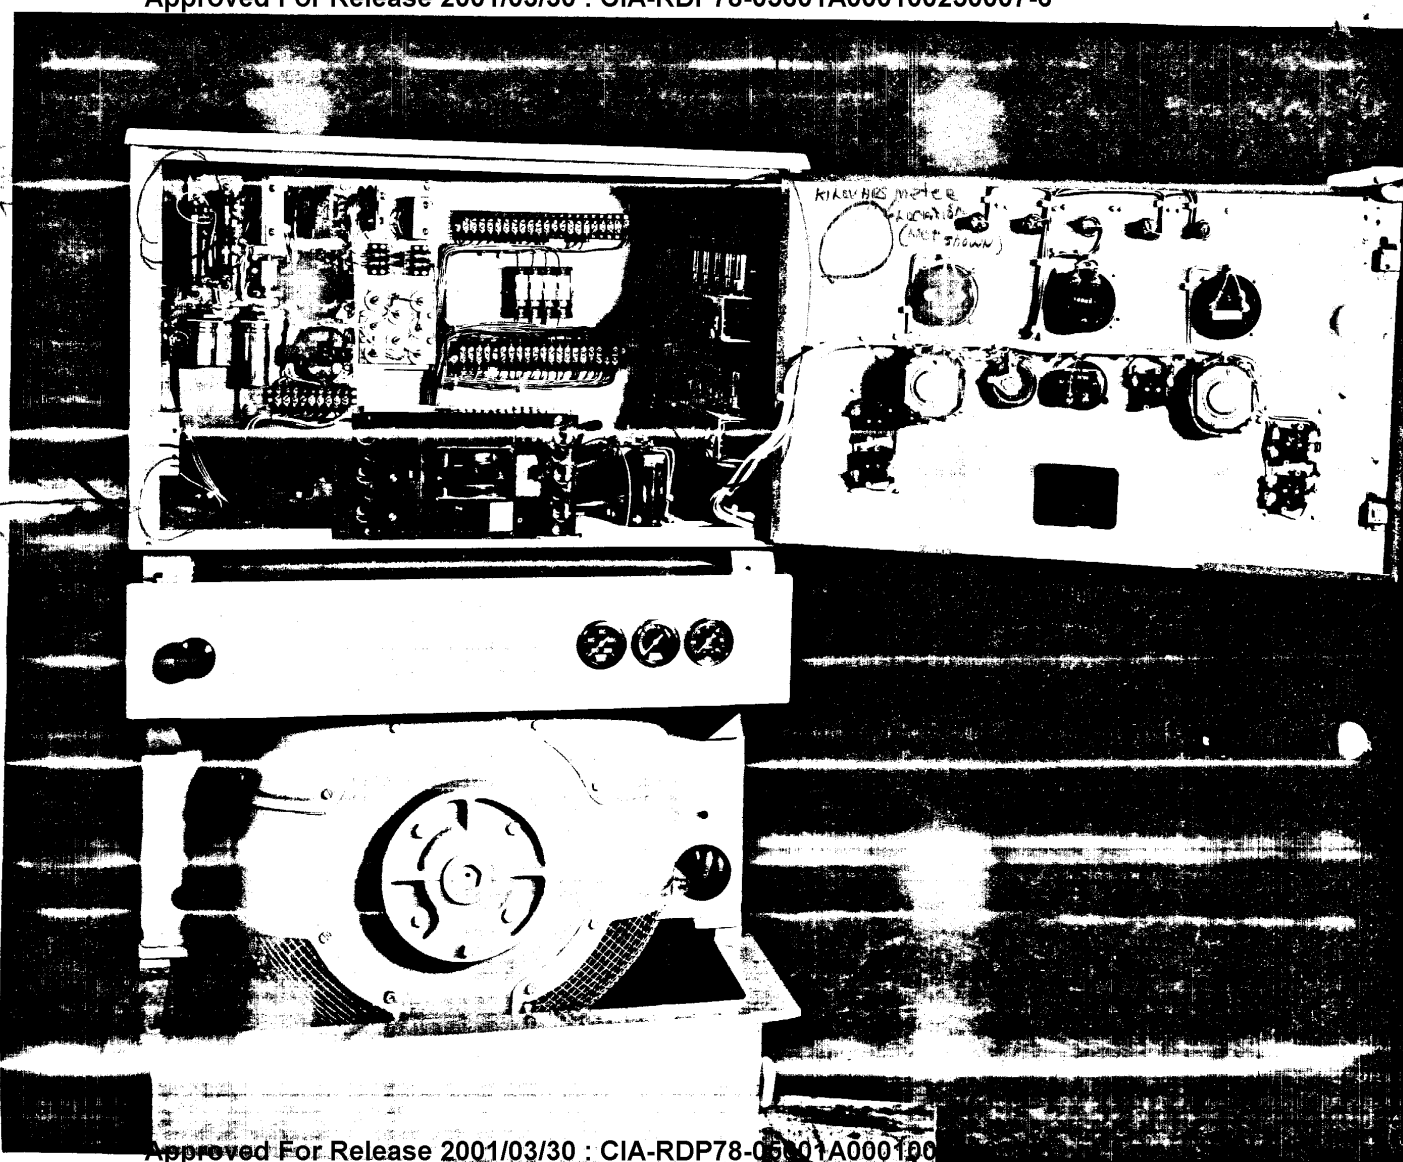

Approved For Release 2001/03/30 : CIA-RDP78-05601A000100